



SERIES 850R



SERIES 854R





SERIES 851R

SWIVEL CASTOR SERIES 850R

SWIVEL CASTOR SERIES 851R
WITH TOTAL LOCK

RIGID CASTOR SERIES 854R

Features:

- Grey (RAL 7004) polyamide casing
- Stainless steel double ball bearing swivel
- Plastic cover on swivel and stainless axle
- Wheel-Ø 100 mm and 125 mm

Options:

- Further RAL colours available, minimum order quantity required, please contact STEINCO
- Further fittings available



**COMMERCIAL KITCHEN
EQUIPMENT**

**HOSPITAL AND ELECTROME-
DICAL EQUIPMENT**

**SHOP FITTING
EQUIPMENT**

BAKERY EQUIPMENT




design award
winner
1992



BALL BEARING WHEEL

- Non marking grey thermoplastic rubber tyred
- Polypropylene hub
- Stainless steel ball bearing with polyamide housing
- Screwed rust free axle
- Wheel-Ø 100 mm, 125 mm

FITTINGS

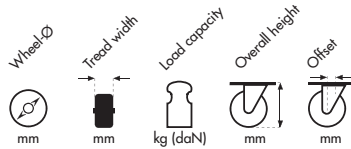

SERIES 850R

SWIVEL CASTOR

SERIES 851R

SWIVEL CASTOR WITH TOTAL LOCK

SERIES 854R

RIGID CASTOR

BOLT HOLE



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset
10,3	100	32	80	135	33
10,3	125	32	100	161	35
12,8	100	32	80	135	33
12,8	125	32	100	161	35

See page 114.

Code-no.

Code-no.

1.KJB.PTL	2.KNB.PTL
1.KAB.PUL	2.KEB.PUL
1.KJH.PTL	2.KNH.PTL
1.KAH.PUL	2.KEH.PUL

TOP PLATE



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset
77x67	125	32	100	161	35
90x70	100	32	80	135	33
90x70	125	32	100	161	35

Top plate dimensions shown on page 113.

Code-no.

Code-no.

Code-no.

1.KCB.PUL	2.KGB.PUL	5.J4B.PUL
1.KL1.PTL	2.KQ1.PTL	
1.KC1.PUL	2.KG1.PUL	5.J4M.PUL

SCREW



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset
M 10 x 25	100	32	80	135	33
M 10 x 25	125	32	100	161	35
M 12 x 25	100	32	80	135	33
M 12 x 25	125	32	100	161	35

Code-no.

Code-no.

1.KKT.PTL	2.KPT.PTL
1.KBT.PUL	2.KFT.PUL
1.KK2.PTL	2.KP2.PTL
1.KB2.PUL	2.KF2.PUL

PLAIN STEM



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset
18 x 62	100	32	80	135	33
18 x 62	125	32	100	161	35

A list of adaptors for round and square tubing appears on page 112.

Code-no.

Code-no.


1.KMB.PTL	2.KRB.PTL
1.KDB.PUL	2.KHB.PUL



PLAIN BEARING WHEEL

- Non marking grey thermoplastic rubber tyred
- Polypropylene hub
- Stainless steel bush
- Screwed rust free axle
- Wheel-Ø 100 mm and 125 mm

FITTINGS

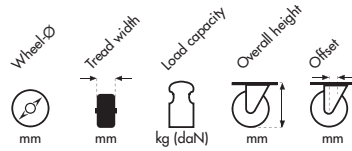

SERIES 850R
SWIVEL CASTOR

SERIES 851R
SWIVEL CASTOR WITH
TOTAL LOCK

SERIES 854R
RIGID CASTOR

BOLT HOLE



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset
10,3	100	32	80	135	33
10,3	125	32	90	161	35
12,8	100	32	80	135	33
12,8	125	32	90	161	35

Code-no.

Code-no.

1.KJB.JKX
1.KAB.JLX
1.KJH.JKX
1.KAH.JLX

2.KNB.JKX
2.KEB.JLX
2.KNH.JKX
2.KEH.JLX

See page 114.

TOP PLATE



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset
77x67	125	32	90	161	35
95x70	100	32	80	135	33
90x70	125	32	90	161	35

Code-no.

Code-no.

Code-no.

1.KCB.JLX
1.KL1.JKX
1.KC1.JLX

2.KGB.JLX
2.KQ1.JKX
2.KG1.JLX

5.J4B.JLX
5.J4M.JLX

Top plate dimensions shown on page 113.

SCREW



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset
M 10 x 25	100	32	80	135	33
M 10 x 25	125	32	90	161	35
M 12 x 25	100	32	80	135	33
M 12 x 25	125	32	90	161	35

Code-no.

Code-no.

1.KKT.JKX
1.KBT.JLX
1.KK2.JKX
1.KB2.JLX

2.KPT.JKX
2.KFT.JLX
2.KP2.JKX
2.KF2.JLX

PLAIN STEM



mm	Wheel Ø	Tread width	Load capacity	Overall height	Offset
18 x 62	100	32	80	135	33
18 x 62	125	32	90	161	35

Code-no.

Code-no.

1.KMB.JKX
1.KDB.JLX

2.KRB.JKX
2.KHB.JLX

A list of adaptors for round and square tubing appears on page 112.